


MODEL SL-10000, SL-12000, & SL-15000 SURFACE-MOUNTED SPEED-LIFT

2 Year Parts & Labor Warranty

The SL-10000, SL-12000 and SL-15000 from our Gold Line are suitable for loading/unloading trucks with hand carts, dollies, pallet jacks, and small forklifts.

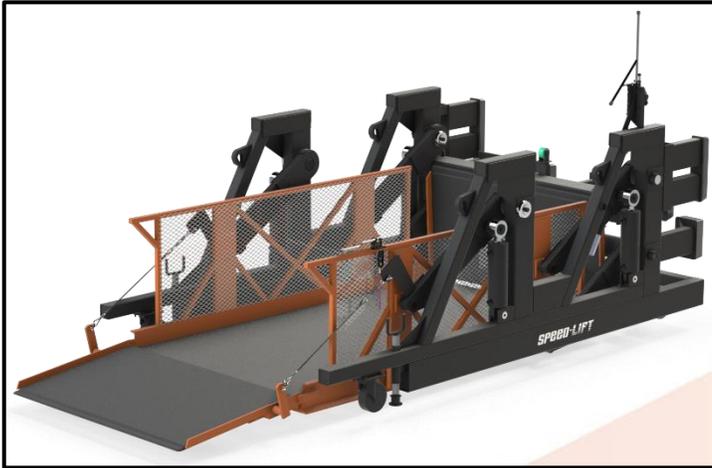




- Capacity: 10,000, 12,000 or 15,000 pounds across the entire platform
- Platform Size: C = 68" W x 120" L
- Lowered Height: 4"
- Motor Size: SL-10000 – 15HP
SL-12000 – 20HP
SL-15000 – 20HP
- Cylinder Size (Qty - 4): 5"
- Hydraulic Fluid: Dexron III/Mercon Multi-Purpose ATF
- Travel Speed: 41.5 FPM or 7 seconds from truck to ground
- Maximum Travel Height: 58"
- Shipping Weight (Pounds):

Model	Platform C
SL-10000-C	7,170
SL-12000-C	8,800
SL-15000-C	8,800

Speed-Lift Key Features & Benefits:

- All production is done in the **USA with proven COTS components**
- All electrical control boxes are **UL approved**
- All Speed-Lifts conform to **ANSI MH29.1** specifications
- All models have patented **Automatic Folding Ramps** instead of safety chains. These eliminate the need for employees to maneuver around loads to manually lift and lower heavy ramps, thus **greatly reducing the risk of finger injuries**
- All units are made with high-grade steel. The platform, ramp, and bridge are **non-skid diamond plate**
- Speed-Lifts **do not require pits**, drains, bollards, building permits, or other costly on-site infrastructure
- All Speed-Lifts have a steel construction including a 3-sided lift frame which, together with the hinged ramps, provides **360-degree toe and foot protection**
- The Hydraulically Actuated Parallelogram lift mechanism ensures smooth and consistent operation with **variable speed control** for controlled ascent and descent
- Our lifts are designed to withstand severe weather conditions and operate for **more than 30 years** with routine maintenance which consists of regular lubrication of all bearings plus visual inspection of wiring and hydraulic lines for wear and tear
- The closed hydraulic control system requires a routine check of the oil level and normally **does not require any oil changes**
- The mechanical, hydraulic, and electrical systems are self-contained within the frame so **no separate control unit is required**
- All **parts can be purchased directly** from our facility in Ormond Beach, FL
- Regular **preventative maintenance contracts** are available in which your lift will be serviced twice per year

SL-10000, SL-12000, SL-15000 Series Speed-Lift

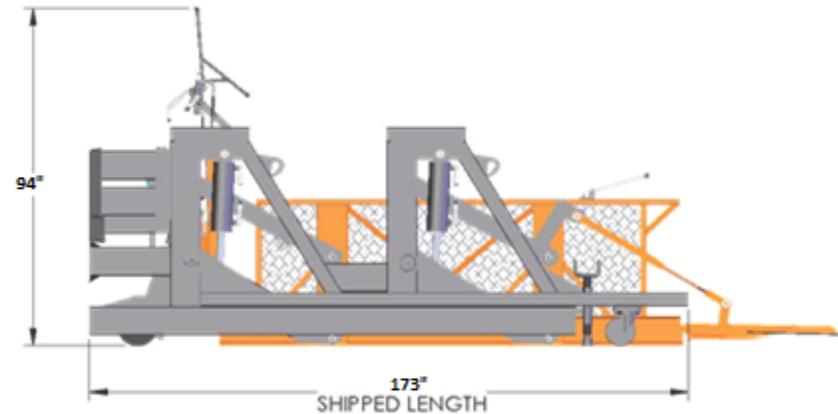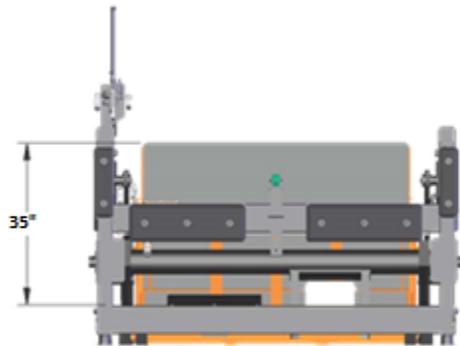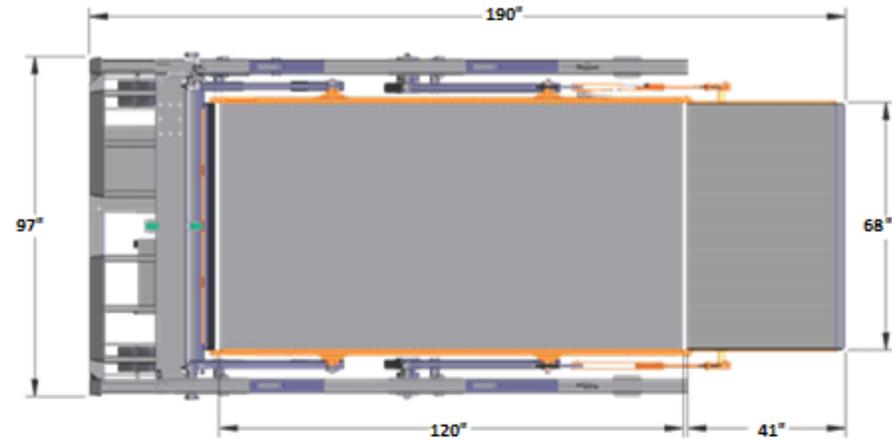

Model No.	Capacity (Pounds)	Motor Rating (HP)	Usable Platform Size W x L (Inches)	Platform Lowered Height Above Pad (Inches)	Minimum Bridge Opening Height Above Pad (Inches)	Maximum Bridge Opening Height Above Pad (Inches)	Overall Length - Ramp Down - (Inches)	Maximum Width (Inches)	Ramp Length (Inches)	Bridge Length (Inches)	Shipped Length (Inches)
SL-10000-C	10,000	15	68 x 120	4	45.5	59.0	190	97	41	35	173
SL-12000-C	12,000	20									
SL-15000-C	15,000	20									

Lift Part Number: SL-____-C-AFR-SBP-PLP-GA/SS-230V/3Ph

Lift Description: SL-____-C Speed-Lift - _____ Pounds Capacity (68" x 120" Platform) with a Standard Bridge - <5" Pad Height/Elevation Difference - configured with a 35" Standard Length Bridge and including 41" Automatic Folding Ramp, Step Bumper Protectors, Ground Anchor System - Core Drill Sleeves - Existing Concrete Pad, 230VAC/3 Phase Power Supply, and Platform Locking Pin